



Job Name _____

Address _____

Designer/Engineer _____

Wholesaler _____

Mechanical Contractor _____

Model / Quantity ☐ DTB 25 _____ ☐ DTB 55 _____
 ☐ DTB 80 _____

Date _____

Features

- Stainless Steel construction, pickled & passivated
- 2" of polystyrene foam insulation
- 1 ½" heat source and heating system connections
- Thermal well for aquastat or temperature sensor
- Lightweight for easy installation
- Maintenance free design


Warranties

- 1 year limited parts warranty
- 6 years limited tank warranty

Specifications

Specification	DTB 25	DTB 55	DTB 80
Diameter	20.1	21.8	23.8
Inches (cm)	(51.1)	(55.5)	(60.4)
Height	38.6	61.7	68.9
Inches (cm)	(98.0)	(156.8)	(175.0)
Volume	26.4	52.8	79.3
Gallons			
Max. Operating Pressure	150	150	150
PSI			
Max. Temperature	185	185	185
°F (°C)	(85)	(85)	(85)
Weight	40	66	86
Pounds (kg)	(18)	(30)	(39)
Shipping Weight	53	84	106
Pounds (kg)	(24)	(38)	(48)
Connection Size	1.5	1.5	1.5
Inches			

Dimensions

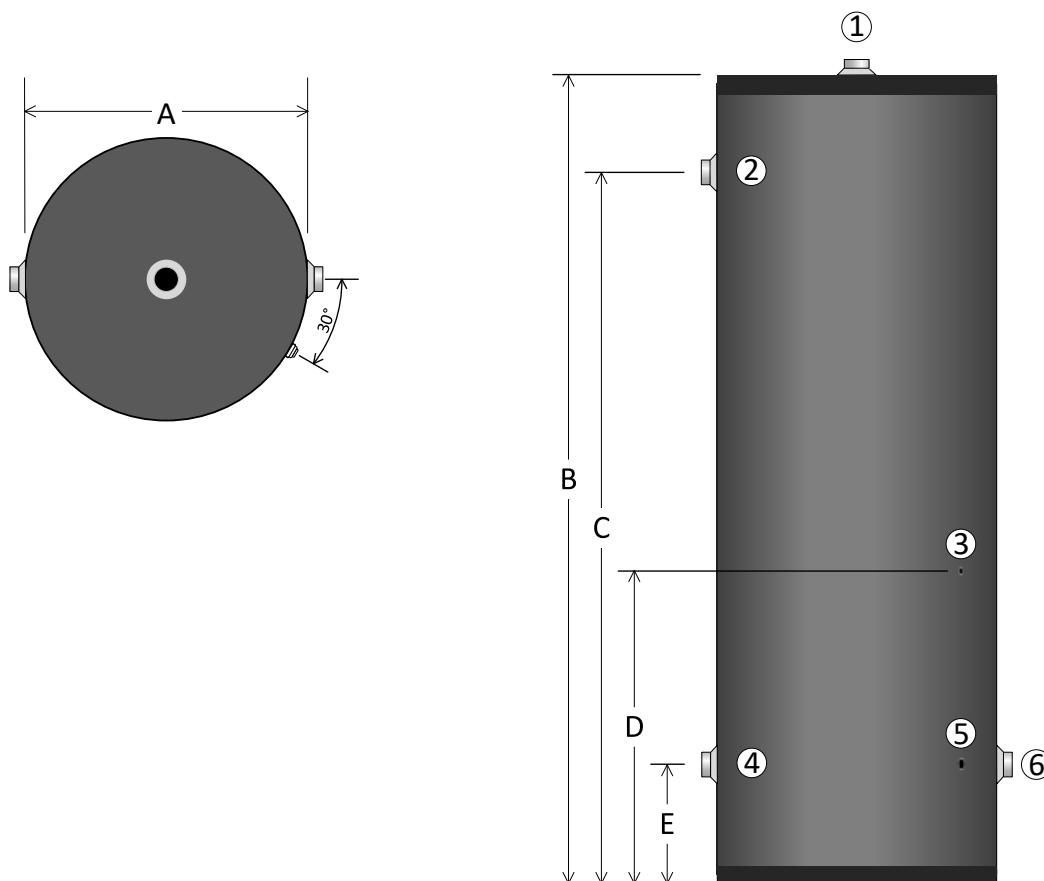

Dimension	DTB 25	DTB 55	DTB 80
A = Diameter	20.1	21.8	23.8
Inches (cm)	(51.1)	(55.5)	(60.4)
B = Height	38.6	61.7	68.9
Inches (cm)	(98.0)	(156.8)	(175.0)
C = Heat Supply	30.7	52.6	60.3
Inches (cm)	(78.0)	(133.7)	(153.2)
D = Sensor / Aquastat Well	22.5	24	26.3
Inches (cm)	(57.0)	(61.0)	(66.7)
E = Heat Return & Drain & System Return	9.6	10.4	10.1
Inches (cm)	(24.5)	(26.5)	(25.7)

Legend	DTB 25, DTB 55, DTB 80
1	System Supply (1 ½" M)
2	Heat Supply (1 ½" M)
3	Sensor / Aquastat Well
4	Heat Return (1 ½" M)
5	Drain (¾" F)
6	System Return (1 ½" M)