



Job Name _____

Address _____

Designer/Engineer _____

Wholesaler _____

Mechanical Contractor _____

Model / Quantity IBT 25 _____ IBT 52 _____

Date _____


Features

- Galvanized and powder coated steel jacket
- High density polyurethane foam insulation
- Temperature sensor well
- Vessel constructed of 444 Stainless Steel
- Field connection fittings constructed of 316L Stainless Steel
- Pickled and passivated for enhanced corrosion resistance


Warranties

- Vessel carries a fifteen (15) year limited warranty for residential applications
- Vessel carries a five (5) year limited warranty for commercial applications

MODEL	STORAGE VOLUME USG / L	PIPE CONNECTIONS	DRAIN CONNECTION	MAX WORKING PRESSURE
IBT 25	23.2 / 88	1 ½" Male NPT	¾" Female NPT	150 psi
IBT 52	52.6 / 199	1 ½" Male NPT	¾" Female NPT	150 psi

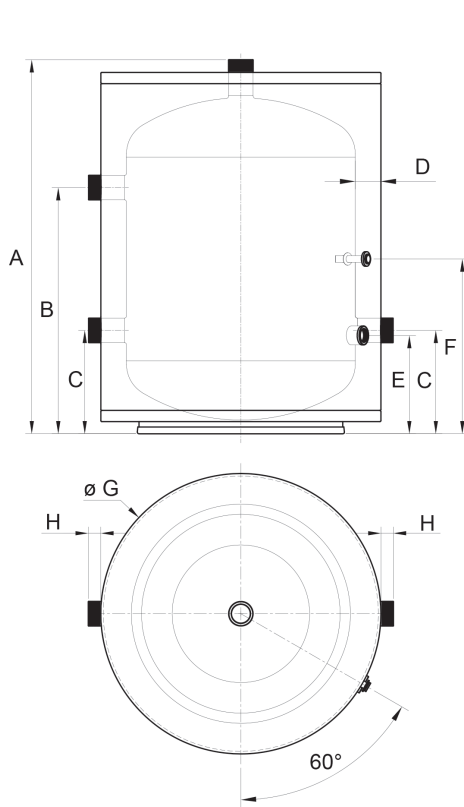

IBT 25

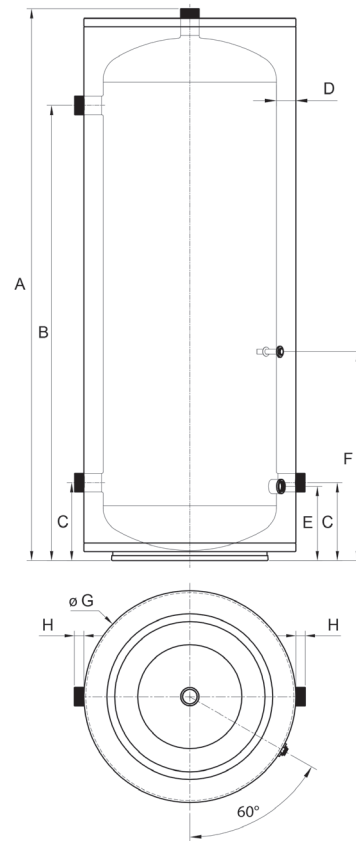

IBT 52

DIMENSIONS (INCHES / CM)								
MODEL	A	B	C	D	E	F	G	H
IBT 25	29.1 / 74	19 / 48.3	8 / 20.3	2 / 5	7.6 / 19.3	13.5 / 34.3	21.7 / 55	1 / 2.5
IBT 52	56.7 / 144	46.6 / 118.3	8 / 20.3	2 / 5	7.6 / 19.3	21.4 / 54.3	21.7 / 55	1 / 2.5